



Project: Roof Replacement
CENTRE SQUARE TOWERS
1500 Market Street
Philadelphia, Pennsylvania 19102

Owner: **Met Life**
New York, New York 10166


Contractor: Belcher Roofing Corp.
Glenside, Pennsylvania 19038

Assembly: Siplast 2 ply Modified Bitumen
Membrane (IRMA)

Completion: September, 2000

Cost: \$ 748,212

CENTER SQUARE TOWERS

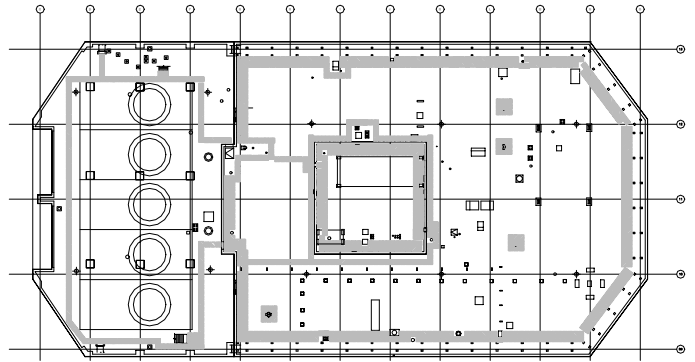

ROOF PLAN—WEST TOWER
SCALE: 1/8" = 1'-0"



Comment: In order to minimize the impact of the roofing installation, on the building tenants, the decision to leave the existing roofing assembly was agreed upon by the client. This decision to not remove the existing assembly attributed to the lower cost of the project without impact to the life expectancy of the new roof system. Installation of 2 ply modified bitumen with new drainage boards and insulation.